



FW-288

POC Trunking Radio

USER'S MANUAL

As a result of technical improvements, the functions are subject to change without notice

ANY DISTANCE, ANYWHERE

CONTENTS


Checking Equipment.....	1
Getting Acquainted.....	2
FW-288 Diagram.....	2
Icon Display	4
Basic Operations.....	4
Power On / Off	4
Transmitting.....	4
Receiving	5
Menu Operation	5
Advanced Functions.....	6
Monitor Group.....	6
Private Call, Multi-members Selective Call, Temporary Group.....	7
Key Locked Function	7

Checking Equipment


Carefully unpack the radio. We recommend that you identify the items listed in the following table before discarding the packing material. If any items are missing or have been damaged during shipment, file a claim with the carrier immediately.

ACCESSORIES


ITEM	QUANTITY
USB Cable	1
Adapter	1
Charger Cradle	1
Battery	1
Belt Clip	1
User's Manual	1
Dual Charger Cradle (Optional)	1




USB Cable




Adapter



Single Charger Cradle




Battery



Belt Clip







User's Manual



Dual Charger Cradle (Optional)

Getting Acquainted

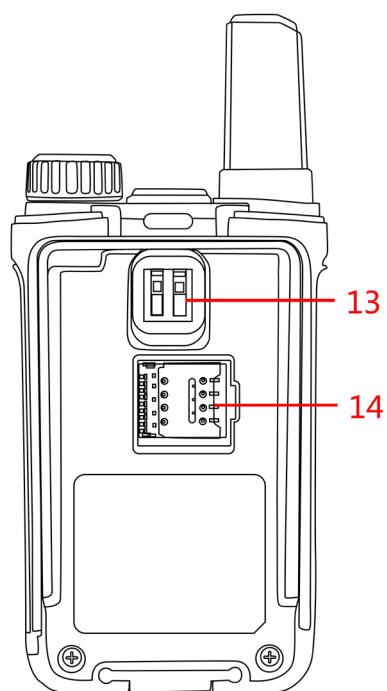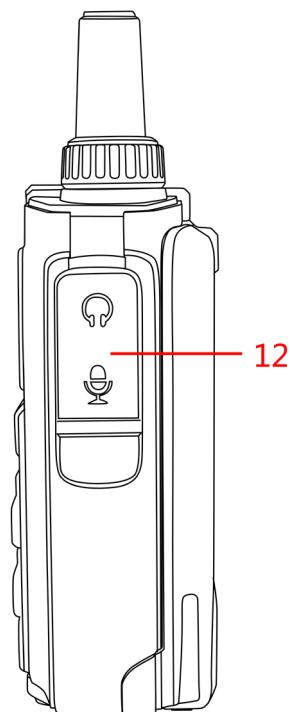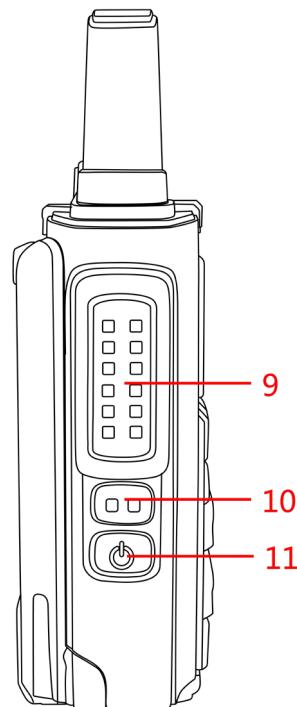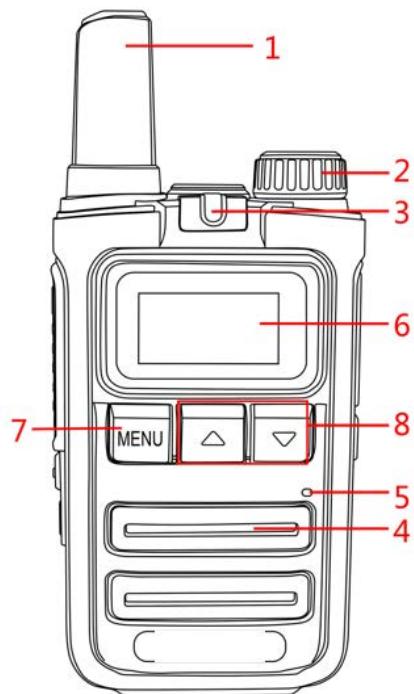

1. Antenna**2. Volume Control**

Turn the volume control clockwise to increase volume.

Turn the volume control anticlockwise to decrease volume.

3. Indicator Lamp

Light Red: Transmitting

Light Blue: Receiving

4. Speaker**5. Mic****6. OLED Screen****7. MENU Key**

Short press to enter the submenu or confirm/save the selection

8. UP Key & DOWN Key

Press “▲” or “▼” Key to select items

On standby states, short press up key or down key to enter the group selection

9. PTT

Long press PTT to transmit, release PTT to return to receive states

In any states, short press PTT to return the standby

10. PF1 Button

In standby mode, short press to enter the friend list

In any mode, long press the button to send the SOS on the selected group.

11. PF2 Button

In Menu mode, short press to return to the previous menu or standby mode

Long press the button to power on / off.

12. Programming Jack**13. Contact****14. SIM Card Slot**

Icon	Name	Status
	Battery Power	More bars indicate more battery power
	Battery Charging	On charging
	SOS	Transmit SOS or receive SOS
	GPS	Solid Icon means positioning successful Hollow Icon means positioning failed.
	Key lock	Keypad locked
	New Dispatcher MSG	New or Unread Dispatcher MSG
	Signal Strength	More bars indicate stronger signal strength

Basic Operations

Please check the following two items before using	
N	a. Please make sure the SIM card has been activated and has start the
O	data service.
T	b. Please make sure the radio has been programmed with the activated
E	platform account and the correct APN information.
	If not, please contact local dealer for assistance.

1. Power On / Off

Long press the PF2 button to power on / off.

NOTE: Don't remove battery directly to power off, otherwise it will lead to the data loss and the radio damages.

2. Transmitting

Long press PTT to transmit (LED indicator lights red), keep away from microphone at least 5cm.

Exception & Talking Priority:

If there is an advanced user starts to talk when you're transmitting, you will be forced to exit the transmitting mode.

3.Receiving

The LED indicator lights blue, LCD screen displays transmitter's name when receiving.

MENU Operation

- Press **MENU** Key to enter menu
- Press “▲”or“▼” Key to choose menu item
- Short press PF2 button return the previous menu list
- Press **MENU** Key to confirm the selection

Menu	Submenu	Settings	Function Instruction
Choose Group Remark: The selection can enter once radio log in.			Choose a group
Friends List Remark: The selection can enter once radio log in.			Select one or multiple online friends make private call
User List Remark: The selection can enter once radio log in.			Select one or multiple online users make private call
Dispatcher MSG			Enter to check the dispatcher messages
GPS INFO			Check the local GPS information (latitude and longitude)
ADV Settings	Network Mode	Auto	Select the stable network automatically
		2G only	Select 2G network to log in
		3G only	Select 3G network to log in
		4G only	Select 4G network to log in
		3G Prefer	Select 2G or 3G network to log in
	MIC Level	-2	MIC volume -2
		-1	MIC volume -1
		Standard	MIC volume is on standard
		+1	MIC volume +1
		+2	MIC volume +2
	Sound Quality	STD Mode	Transmitting and receiving is at the standard volume
		HQ Mode	Transmitting and receiving is at the high

Settings	SOS mode	quality volume	
		Off	Close SOS function
		Normal	Long press the PF1 button, send SOS to the current group
		HOT MIC	Long press the PF1 button, send SOS to the current group, auto open MIC 10s, per 20s repeat again, total 2 times. Long press again the PF1 to cancel SOS ICON
	Time Zone	UTC -12~UTC +14	Enter to choose the correct local time zone
	PoC Update		Enter to upgrade PoC version
	Backlit Mode	Auto	Backlight turns on automatically when operating on keys, transmitting/receiving Backlight is off automatically after 10 seconds without operation
		Open	Backlight keeps on
		Key	Backlight turns on automatically when operating by keys Backlight turns off automatically after 10 seconds no operation
	Auto Lock	ON	Keypad locked automatically after 10 seconds without operation Only can use PTT and side keys
		OFF	Long press MENU button to lock/unlock keypad
	Language	CHS / English / Spanish	
	Key Tone	ON	A beep when operating on keys
		OFF	No voice when operating on keys.
	Roger Beep	ON/OFF	Beep alarm when press/release PTT
	Version		Enter to check the software version, network mode, IMEI

Advanced Functions

1. Monitor Group

Enter group list, short press “PF1” key to monitor other group(s), ICON showed. Short press again to cancel.

2. Private Call, Multi-member Selective Call, Temporary Group

- **Private call:** Short press the MENU button to select the member from the friends/user list, long press PTT button to make a private call.

- **Multi-member Selective Call:** Short press PF1 button to select several members from friends/ user) list, long press PTT button to make a multi-member selective call.

- **Temporary Group:** A group created for a private call or multi-member selective call is called a temporary group. Short press PF2 button to exit the temporary group.

3. Key Locked Function

Long press the MENU button to lock or unlock. In the keyboard locked state, only PTT button, PF1 button long press, PF2 button long press, MENU button long press can be used.