


Open Frame Touch Monitor

HO 325 PTB

80 cm / 31.5" Diagonal
LED Backlight – Format 16:9

- 1920 x 1080 Full HD 1080P Resolution
- 10-Point Touch P-Cap Technology
- 178° / 178° Ultra Wide Viewing Angle
- 400 cd/m² High Brightness Panel
- Video Input: HDMI + Display Port
- **IP55 (front) Rating Level**
- **Display Protection: Thickness 3mm**
- **Built-in Speakers**
- ≥7H Toughened Hard Panel Surface
- Slim Profile, Edge-to-Edge True Flat Surface
- Metal chassis, frame and back cover
- VESA Mount and Multiple Mounting Options
- Edge to Edge glass without raised frame
- Orientation: Landscape, Portrait, Face-Up



80 cm / 31.5"

Part. No.: HO 325 PTB

SIZE, RESOLUTION



32"
16:9 Aspect Ratio



Full HD
1920 x 1080

CONNECTIVITY, IP LEVEL




HDMI
DP



IP 55
Water & Dust
Protection

VIEWING ANGLE, VESA



178 Ultra-Wide
Viewing Angle



VESA
Mount

OTHER FEATURES





10 Point Touch



30.000 Hours
Lifetime

| | |
|------------------------|--|
| Display Size | 80 cm / 31.5" Diagonal |
| Panel Type | TFT – LED Backlight |
| Aspect Ratio | 16:9 |
| Resolution (H x V) | 1920 x 1080 Full HD |
| Brightness (Typ.) | 400cd/m ² Panel / 340 cd/m ² Monitor |
| Contrast (Typ.) | 1.200:1 (Typical) / 10.000.000:1 (Active) |
| Display Area | 698,4 x 392,85 mm |
| Viewing Angle L/R; U/D | 178° H / 178° V (CR > 10) |
| Response Time | 8 msec |
| Pixel Pitch | 0,364 (H) x 0,364 (V) mm |
| Touch Type | Projected Capacitive Type – 10 Point Touch Material Glass + Glass (OGS+CG). |
| Display Colors | 16.7M Colors |
| Horizontal Frequency | 31 ~ 83 kHz |
| Vertical Frequency | 56 ~ 75 Hz |
| Max Display Frequency | 1920 x 1080 @ 60Hz |
| Input 1 | HDMI |
| Input 2 | Display Port |
| Input 3 | USB Type B (Touch) |
| Speakers | Yes, 2W x 2, Earphone output |
| Power Consumption | On: 21W; Stand-by: 0,3W; Off: 0,2W |
| AC Power Range | AC 100 ~ 240 Volt; 50 ~ 60 Hz |
| Product Dimensions | 747 x 64.3 x 451.4 mm (W x D x H) |
| Packing Dimensions | 863 x 163 x 577 mm (W x D x H) |
| Net / Gross Weight | 14,5 Kg / 16,8 Kg |

| | |
|--------------------------|---|
| VESA Mounting | 100 x 100 mm. VESA Screws: M6, 10mm (Max), pitch 1 Rear Cover Screws: M4, 10mm (Max), pitch 0,7 mm |
| Display Protection | Thickness 3±0,3 mm |
| Hardness / Transmittance | ≥7H Toughened hard panel surface / ≥86% |
| IP Rating Level | IP 55 on surface (Front), Dust and Water Protection * |
| Controls | Menu, Up, Down, Bri (+), Vol (-), Input/Return, Power |
| LED Backlight life | 30.000 hours |
| Accessory | EU and UK Power Cables; HDMI Cable (1.5m); USB Cable for Touch (1,8m); Quick Start Guide, Warranty Card |
| On Screen Display | 15 Languages |
| Color | Warm, Nature, Cool, User's Mode |
| Preset Mode | PC, Movie, Game, ECO Modes |
| Housing | Material: Sheet Metal, Color: Black |
| Orientation | Landscape, Portrait, Face-Up |

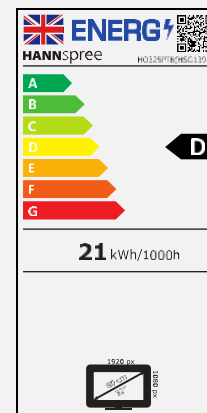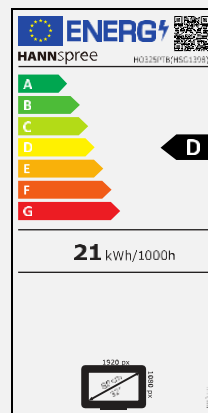


| | |
|--|--------------|
| Supplier's Name | HANNspree |
| Model Name | HO325PTB |
| Energy efficiency class for standard Dynamic Range (SDR) | D |
| Annual Energy Power Consumption (kWh/1000h) | 21 kWh/1000h |
| On mode power demand for Standard Dynamic Range (SDR) | 21 W |
| Off mode power demand (W) | 0,2 W |
| Standby mode power demand (W) | 0,3 W |
| Screen Diagonal (cm / inches) | 80cm / 31.5" |
| Resolution | 1920 x 1080 |

PART. NO.:
HO 325 PTB



4 711404 023002 >

HO 325 PTB 32" Open Frame Touch Monitor

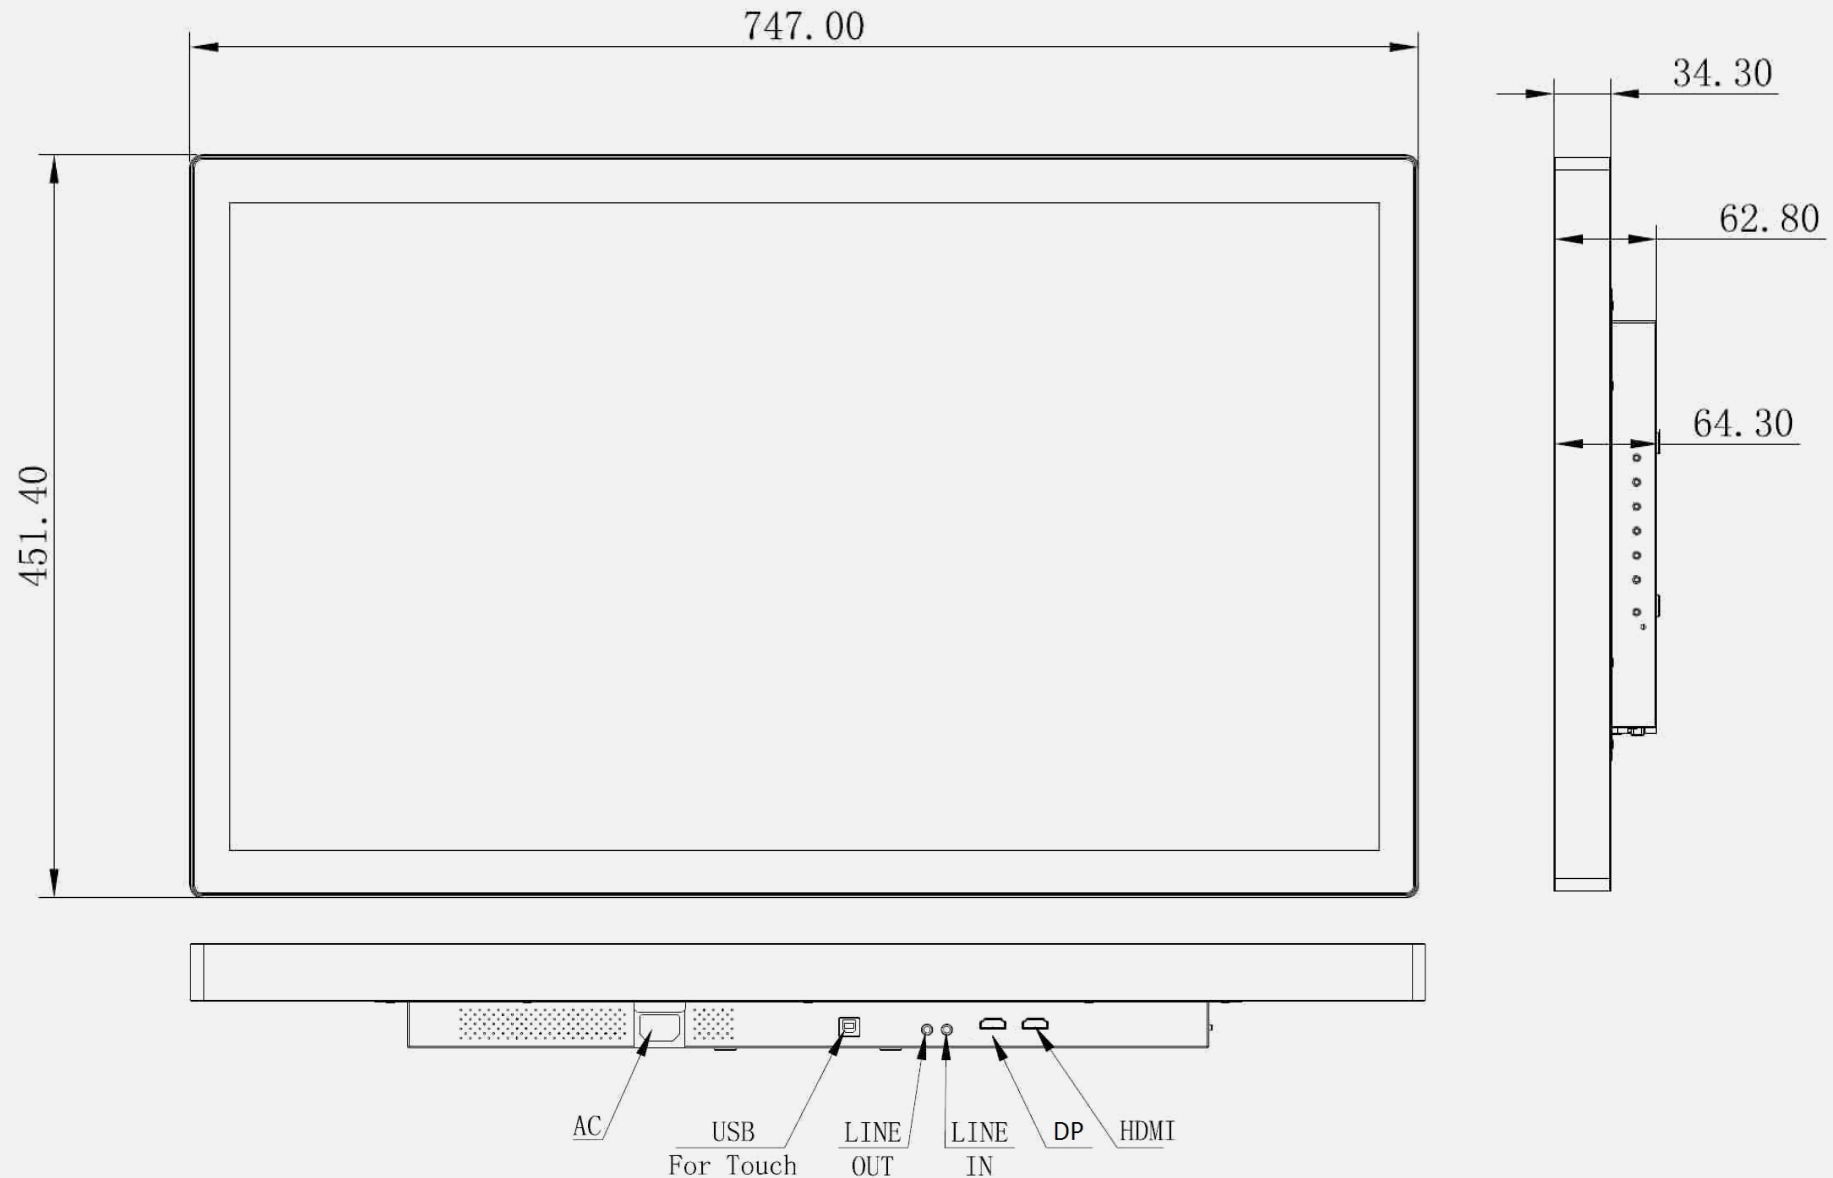

HO 325 PTB 32" Open Frame Touch Monitor

