



## REACH IN FREEZER

Z55AF-GS2

Top Mounted / 2 Glass Door



### **i** TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz  
 Refrigerant R290  
 Type of Defrost Automatic  
 Interior Material Stainless Steel  
 Exterior Material Stainless Steel  
 Temperature Range °F 0 ~ -8°F  
 Compressor Power (HP) 1-  
 Nema Config. NEMA5-15P



### PRODUCT FEATURES



The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit



Hinged glass doors, tempered glass, UV blocking.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Epoxy coated wire shelves.



Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.



High quality coated stainless adjustable shelves prevent peel and rust.



Lifetime warranty on hinges.



Adjustable front locking casters.



### HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey



+1(708) 590-9543



info@zuilex.com



www.zuilex.com


# DETAILS & SPECIFICATIONS

Z55AF-GS2

Front View



Side View

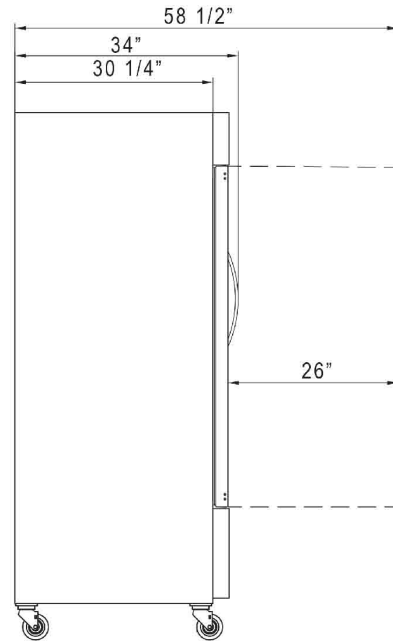

Rated Voltage	220V
Rated Frequency	50Hz
Total Input Power	1065W
Total Current	5.3A
Energy Consumption	14.7kW.h/24h
Total Capacity	40.74 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/8.82oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
Z55AF-GS2	55 1/8 x 35 5/8 x 80 3/8	57 1/8 x 36 5/8 x 82 3/8	506 lbs	8	16



Los Angeles | San Francisco | Dallas  
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com