

Top Mounted / 2-Solid Door





## TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2+ Nema Config. NEMA5-15P

## **PRODUCT FEATURES**

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- [ ] Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 忆 Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



**(1)** +1(708) 590-9543




info@zuilex.com




www.zuilex.com

## **DETAILS &**SPECIFICATIONS

## Z55AR

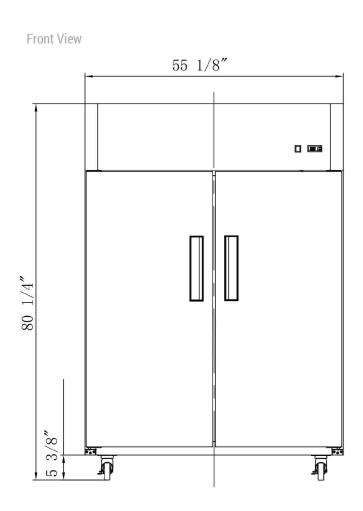



220V	
50Hz	
730W	
8.6A	
41.73 cu ft	
4-5	
1	
300 PSIG	
150 PSIG	
C-Pentane	
R290/4.58 oz	

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
Z55AR	55 1/8 x 34 1/4 x 80 1/4	57 1/8 x 35 1/4 x 82 1/4	463 lbs	8	16



















info@zuilex.com



www.zuilex.com