

Z83AF

Top Mounted / 3-Solid Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 3/4+3/4 Nema Config. NEMA5-20P

PRODUCT FEATURES

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- [] Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey







info@zuilex.com




www.zuilex.com


DETAILS & SPECIFICATIONS

Z83AF



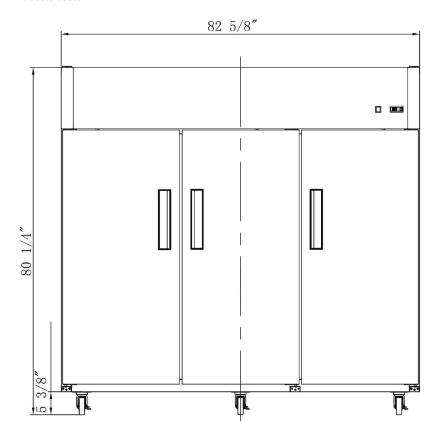

Side View



Rated Voltage	220 V		
Rated Frequency	50 Hz		
Total Input Power	1300W		
Total Current	16A		
Total Capacity	65.98cu ft		
Climatic Category	4-5		
Protection Type			
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/4.2+4.2 oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	THE R. P. LEWIS CO., LANSING MICH.	2.0	40HQ CONTAINER CERT.
Z83AF	82 5/8 x 34 1/4 x 80 1/4	84 5/8 x 35 1/4 x 82 1/4	595 lbs	12	13























www.zuilex.com