

Top Mounted / 3 Glass Door



## TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2+ Nema Config. NEMA5-15P

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey







info@zuilex.com



www.zuilex.com


## **DETAILS & SPECIFICATIONS**

## Z83AR-GS

Front View

82 5/8"



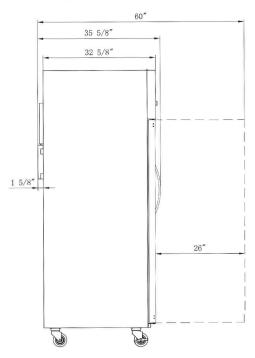

Rated Voltage	220 V		
Rated Frequency	50 Hz		
Total Input Power	760W		
Total Current	8.6A		
Total Capacity	65.88 cu ft		
Climatic Category	4-5		
Protection Type	1		
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/5.22 oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	The second secon		40HQ CONTAINER CERT.
Z83AR-GS	82 5/8 x 35 5/8 x 80 3/8	84 5/8 x 36 5/8 x 82 3/8	650 lbs	12	13























www.zuilex.com

