

**PREMIUM
WARRANTY**

GLASS DOOR MERCHANDISER

ZSM-12R








Single Glass Swing Door Refrigerator



i TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz
Refrigerant R290
Type of Defrost Automatic
Interior Finish White
Exterior Finish Black
Temperature Range °F 33 ~ 40°F
Compressor Power (HP) 1/5
Nema Config. NEMA5-15P

PRODUCT FEATURES

-  The compressor is mounted in the bottom for better heat evaporation.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Interior and canopy LED light with switch on the right side to always show your products at their best
-  High quality coated stainless adjustable shelves prevent peel and rust.
-  Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.

HIGH QUALITY & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

 +1(708) 590-9543

 info@zuilex.com


 www.zuilex.com

DETAILS & SPECIFICATIONS

ZSM-12R

Front View

Side View

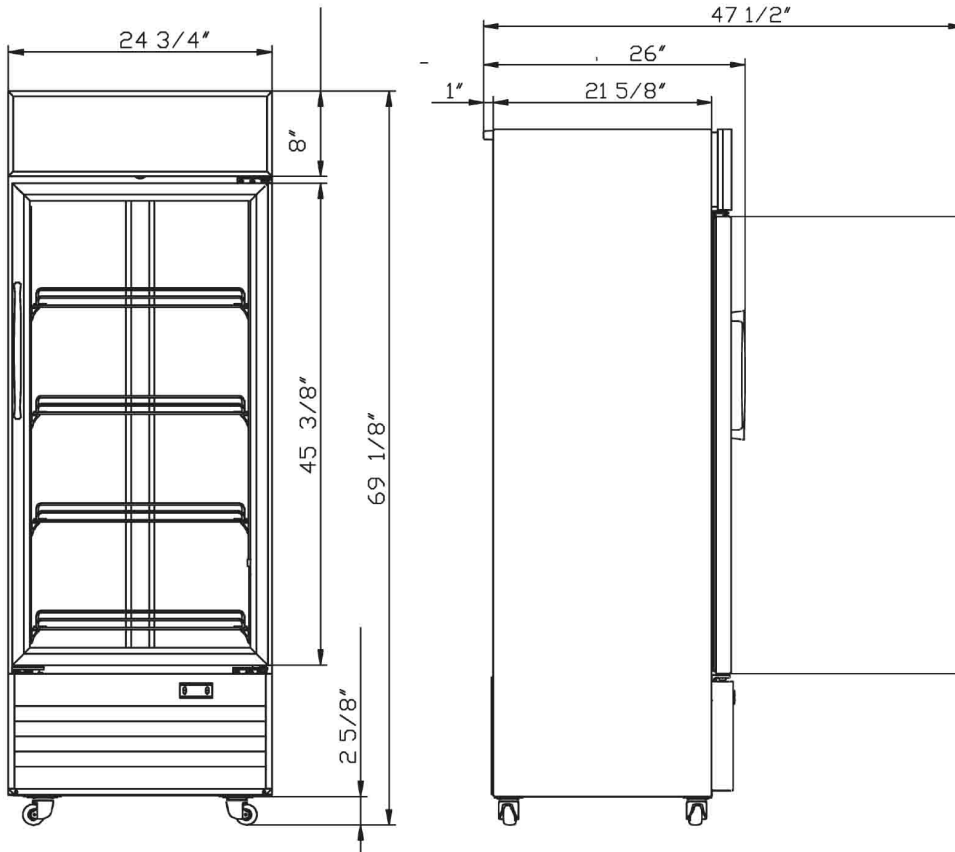

Rated Voltage	220V
Rated Frequency	50 Hz
Total Input Power	235W
Total Current	2.1A
Total Capacity	11.47 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/2.64 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
ZSM-12R	24 3/4 x 26 x 69 1/8	26 3/4 x 27 x 71 1/8	204 lbs	4	51



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com