



**PREMIUM
WARRANTY**

GLASS DOOR MERCHANDISER

ZSM-40R

2-Glass Sliding Door Refrigerator



i TECHNICAL SPECIFICATIONS

Voltage/Frequency

220V/50Hz

Refrigerant

R290

Type of Defrost

Automatic

Interior Finish

White

Exterior Finish

Black

Temperature Range °F

33 ~ 40°F

Compressor Power (HP)

1/2-

Nema Config.

NEMA5-15P



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Interior and canopy LED light with switch on the right side to always show your products at their best



High quality coated stainless adjustable shelves prevent peel and rust.



Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey



+1(708) 590-9543



info@zuilex.com





www.zuilex.com

DETAILS & SPECIFICATIONS

ZSM-40R

Front View

Side View

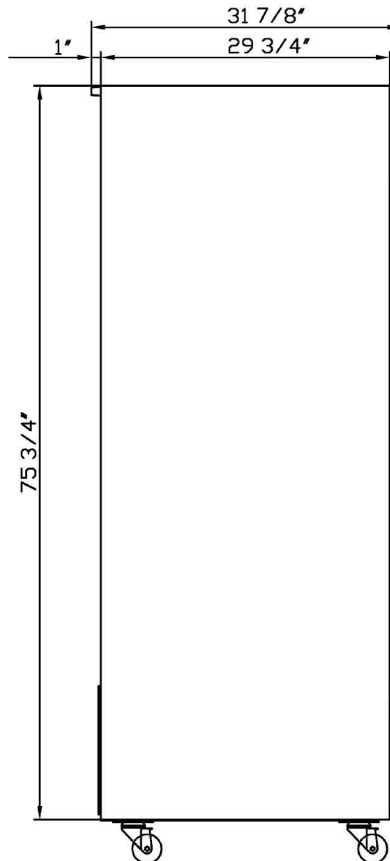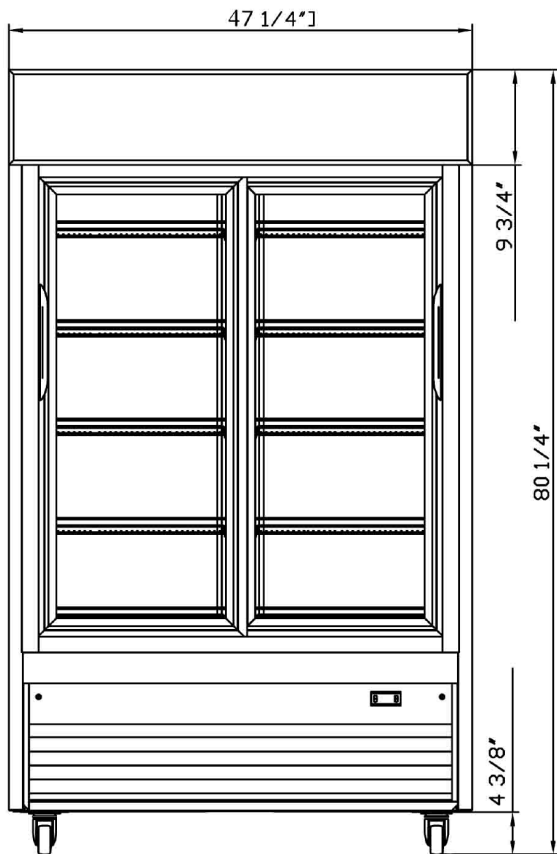

Rated Voltage	220 V
Rated Frequency	50 Hz
Total Input Power	690W
Total Current	9.2A
Total Capacity	39.00 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
ZSM-40R	47 1/4 x 31 7/8 x 80 1/4	49 1/4 x 32 7/8 x 82 1/4	363 lbs	10	23



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com