



**PREMIUM
WARRANTY**

GLASS DOOR MERCHANDISER

ZSM-68SR

3-Glass Sliding Door Refrigerator










i TECHNICAL SPECIFICATIONS

Voltage/Frequency	220V/50Hz
Refrigerant	R290
Type of Defrost	Automatic
Interior Finish	White
Exterior Finish	Black
Temperature Range °F	33 ~ 40°F
Compressor Power (HP)	1/2 +
Nema Config.	NEMA5-20P



PRODUCT FEATURES

-  The compressor is mounted in the bottom for better heat evaporation.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Interior and canopy LED light with switch on the right side to always show your products at their best
-  High quality coated stainless adjustable shelves prevent peel and rust.
-  Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

 +1(708) 590-9543


 info@zuilex.com

 www.zuilex.com


DETAILS & SPECIFICATIONS

ZSM-68SR

Front View

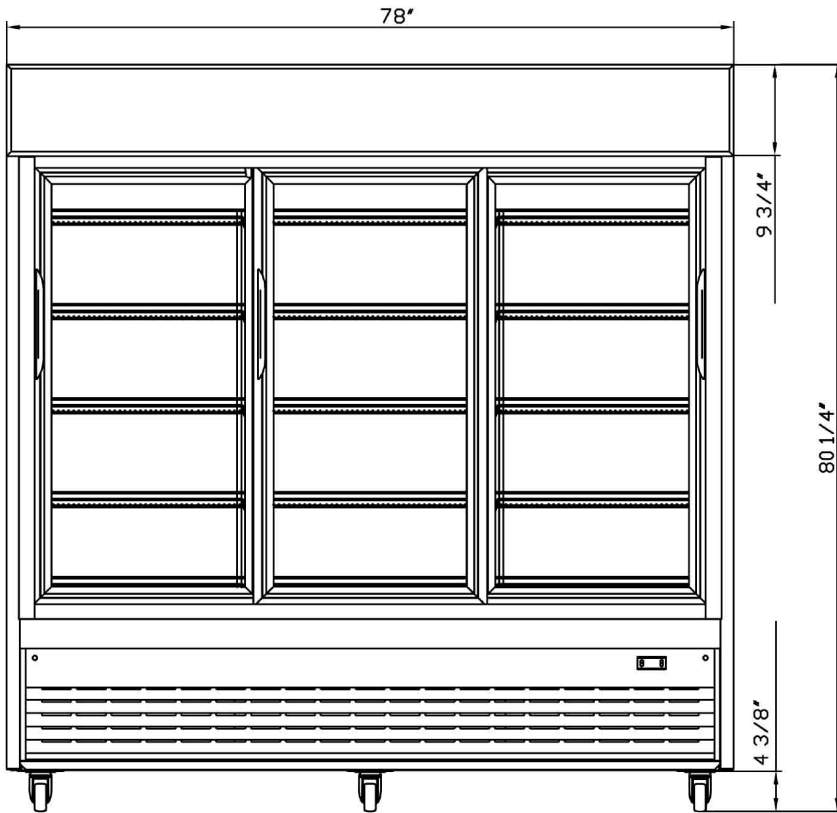

Side View

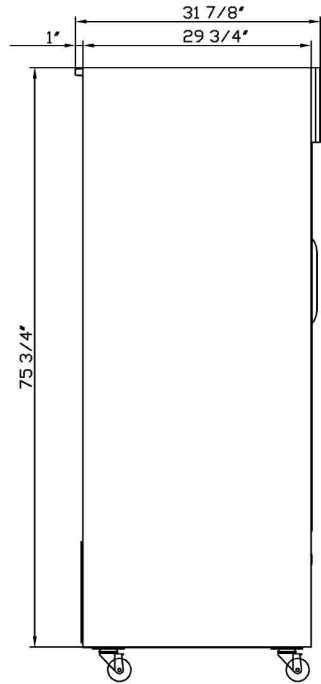

Rated Voltage	220 V
Rated Frequency	50Hz
Total Input Power	823W
Total Current	7.40A
Total Capacity	69 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
ZSM-68SR	78 x 31 7/8 x 80 1/4	80 x 32 7/8 x 82 1/4	528 lbs	15	14



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com