

UNDERCOUNTER REFRIGERATOR

MODEL ZUC29R Single Door



Voltage/Frequency 220 V/50Hz

Refrigerant R290

Type of Defrost Automatic

Interial Material Stainless Steel

Exterior Material Stainless Steel

Temperature Range °F 33 ~ 41°F

Compressor Power (HP) 1/5

Nema Config. NEMA5-15P



PRODUCT FEATURES

- The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant, prometes faster cool down and efficient energy consumption
- Self-closing doors at 60° with stay open feature.
- Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(+1(708) 590-9543




info@zuilex.com




www.zuilex.com

DETAILS & SPECIFICATIONS

UNDERCOUNTER ZUC29R

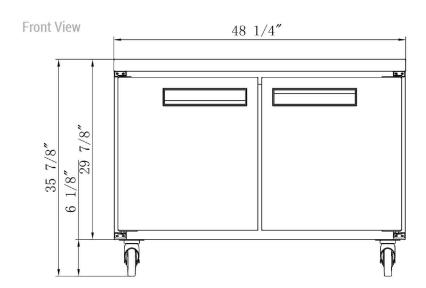

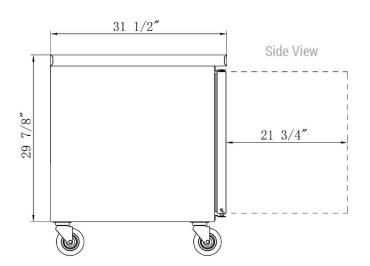

Rated Voltage 220 V Rated Frequency 50 Hz **Total Input Power** 280W 2.4A **Total Current Total Capacity** 12.21 cu ft **Climatic Category** 4-5 **Protection Type Design Pressure High Side 300 PSIG Design Pressure Low Side 150 PSIG** C-Pentane **Insulation Blowing Gas** R290/3.17oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	Maria Company of the		40HQ CONTAINER CERT.
ZUC29R	48 1/4 x 31 1/2 x 36	49 5/8 x 33 1/8 x 39 3/8	211 lbs	2	46























www.zuilex.com