

UNDERCOUNTER REFRIGERATOR

MODEL ZUC72R







Voltage/Frequency 220V/50Hz Refrigerant R290 Type of Defrost Automatic Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/3

Interial Material Stainless Steel Exterior Material Stainless Steel Nema Config. NEMA5-15P



PRODUCT FEATURES

- The back mount compressor structure is placed in the coolest possible area, provides quick and easy service.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant, prometes faster cool down and efficient energy consumption
- Self-closing doors at 60° with stay open feature.
- Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(+1(708) 590-9543




info@zuilex.com




www.zuilex.com

DETAILS & SPECIFICATIONS

UNDERCOUNTER ZUC72R

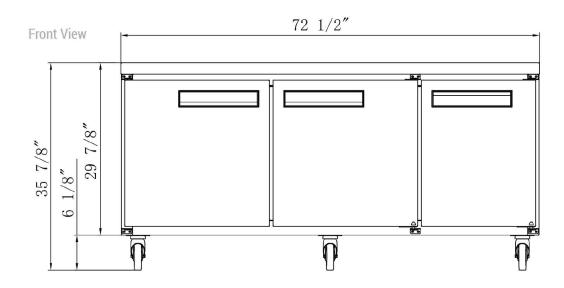



Rated Voltage	220 V		
Rated Frequency	50 Hz		
Total Input Power	380W		
Total Current	3.4A		
Total Capacity	18.96 cu ft		
Climatic Category	4-5		
Protection Type	1		
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/4.41oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
ZUC72R	72 1/2 x 31 1/2 x 36	73 7/8 x 33 1/8 x 39 3/8	242 lbs	3	28























www.zuilex.com

