



CIAO1MAL3X

HIGH SPEED OVEN
DUAL TECHNOLOGY:
3D IMPINGEMENT + MICROWAVE
7" IPS TOUCH SCREEN

FUNCTIONAL CHARACTERISTICS

| | |
|--------------------------|---------------------|
| Display | 7" CAPACITIVE |
| Color | Inox |
| Magnetron | 1 |
| Heater | 2,8kW |
| Supply | Electric |
| Number of motors | 1 |
| Motor speeds | 10 speeds |
| Max cooking temperature | 270°C |
| Core probe | Single point PT1000 |
| Cooking chamber material | AISI304 |
| Opening door | Flap door |
| Chimney | 20mm open |
| Version | Standard |
| Ventless | Standard |



STANDARDS

| | |
|---------------|----|
| Certification | CE |
|---------------|----|

TRAYS

| | |
|------------|--------------------------|
| Trays rack | Sheet metal single level |
|------------|--------------------------|

| | |
|---------------|-----|
| Max tray load | 3kg |
|---------------|-----|

DIMENSIONS

| | |
|-----------------------------|--------------------|
| Oven size with handle WxDxH | 363 x 730 x 630 mm |
|-----------------------------|--------------------|

| | |
|--------------------------------|--------------------|
| Oven size without handle WxDxH | 363 x 679 x 630 mm |
|--------------------------------|--------------------|

| | |
|--------------------|--------------------|
| Chamber size WxDxH | 310 x 320 x 170 mm |
|--------------------|--------------------|

| | |
|-------------|------|
| Unit weight | 56kg |
|-------------|------|

PACKAGING

| | |
|-----------|---------------------|
| Packaging | Pallet + carton box |
|-----------|---------------------|

| | |
|----------------------|--------------------|
| Packaging size WxDxH | 410 x 790 x 785 mm |
|----------------------|--------------------|

| | |
|----------------------------|------|
| Unit weight with packaging | 65kg |
|----------------------------|------|

ELECTRICAL DATA

HEATERS 2,8kW 50Hz

| | |
|-------|-------|
| Power | 3,6kW |
|-------|-------|

| | |
|-----------|---------|
| Frequency | 50/60Hz |
|-----------|---------|

| | |
|--------------|-----------|
| Power supply | 220-240V~ |
|--------------|-----------|

| | |
|----------|-------|
| Amperage | 15,6A |
|----------|-------|

| | |
|-----------------|-------|
| Power cord req. | 3G1,5 |
|-----------------|-------|

CONNECTIVITY





| | |
|-----|---------|
| USB | USB 2.0 |
|-----|---------|

| | |
|-----------|----------|
| Bluetooth | Standard |
|-----------|----------|

| | |
|-------|----------|
| Wi-Fi | Standard |
|-------|----------|

| | |
|-------|----------|
| Cloud | Standard |
|-------|----------|



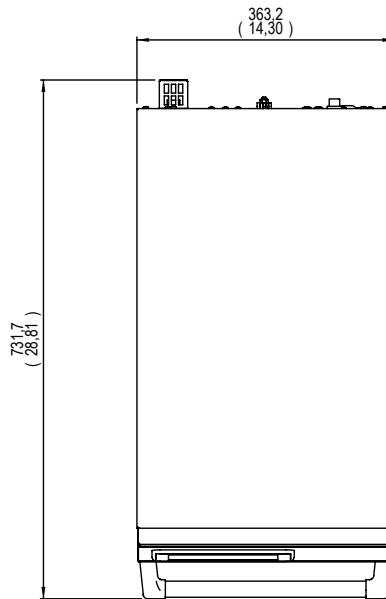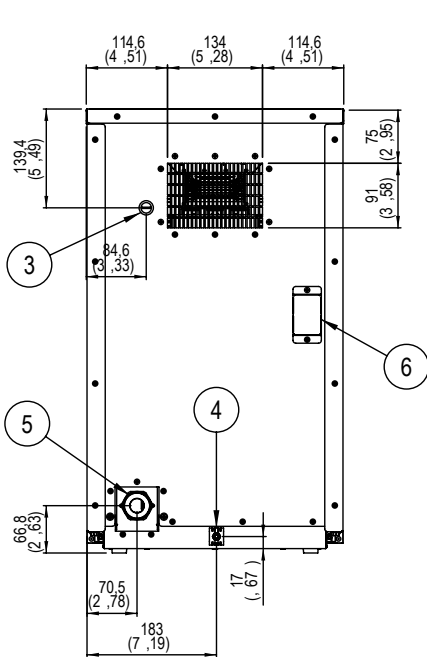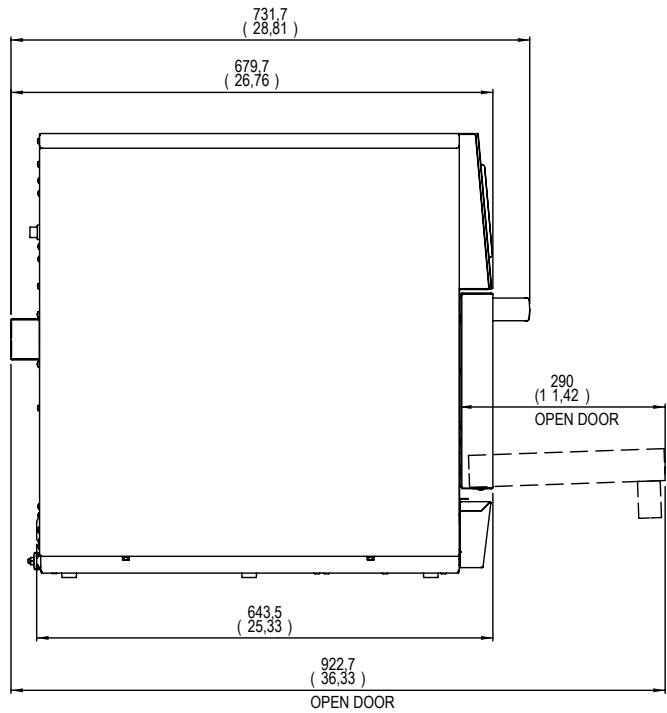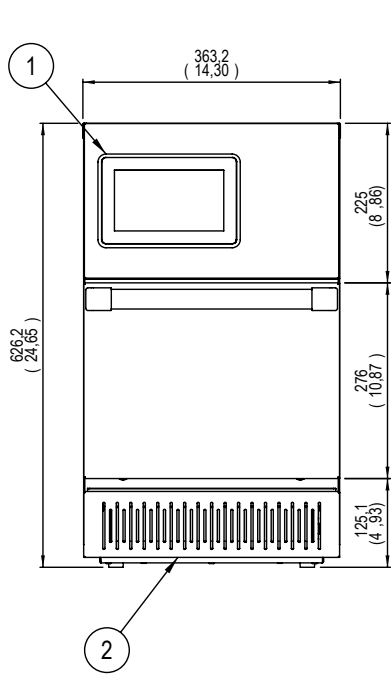

| | |
|---|------------------------|
| 1 | CAPACITIVE LCD CONTROL |
| 2 | AIR INTAKE |
| 3 | SAFETY THERMOSTAT |

| | |
|---|------------------------|
| 4 | EQUIPOTENTIAL TERMINAL |
| 5 | CABLE GLAND |
| 6 | CHIMNEY OUTPUT |

