PI150-98ET

90 IPERLOTUS **ELECTRIC KETTLE**

Electric indirect boiling pan 135 lts. Tank Ø cm. 60x54h (included 1 Head end filler strip mod.TPA-9)



Construction - Fabricated using CrNi 18/10 AISI 304 grade Stainless Steel Scotch-Brite Satin polish Finish, incorporating 2mm thick worktop, rounded edges, chromed details and rear splash back. Knobs with waterproof grades IPX5. Model - Professional Electric Kettle, possible automatic water-charge of double jacket. Indirect and autoclave versions available. From 100 to 140 liters tank constructed in AISI 304 with AISI 316 bottom. Easy and safe open and closing system. Thermostatic control. Maintenance - All serviceable parts are accessible by the easy removal of front control panel. Fittings - Appliance is supplied with adjustable feet.








PI150-98ET

90 IPERLOTUS ELECTRIC KETTLE

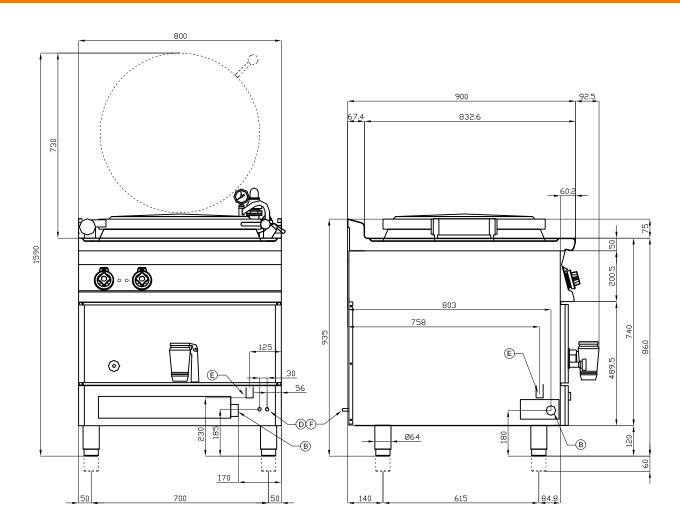

Α	Data plate		В	Electrical connection	
D	Cold water connection	Ø10mm	Ε	Water drainage	Ø25mm
F	Hot water connection	Ø10mm			

MODEL: PI150-98ET

DIMENSIONS: cm. 80x 90x 90h

ELECTRIC POWER: 18 kW

VOLTAGE: 400V~3N

FREQUENCY: 50/60 Hz



kg: 110 m³: 1.071

mm: 870x1070x1150



