

PARAMETERS SHEET

MODEL#: PFLRC-SERIES



Intertek



Intertek

MODEL # PFLRC-900H

Specifications

- Stainless steel for front, Left & Right & Back Galvanized
- High quality U-shape Stainless steel burner with power of 30,000BTU/H each.
- Cast iron grill plate
- Brass Gas Valve from Brand Alpha Manual ignition
- Height Adjustable leg
- 3/4" rear gas connection and gas pressure regulator
- ETL Safety and ETL Sanitation approved

Choose GAS TYPE When Placing Order

- LPG
Liquefied Propane Gas
- NG
Natural Gas

Models in PFLRC series


- PFLRC-400H Gas Charbroiler
- PFLRC-600H Gas Charbroiler
- PFLRC-900H Gas Charbroiler
- PFLRC-1200H Gas Charbroiler

Accessories for Standard

- Adjustable bullet leg
- Convert kit of LP and NPG
- Gas pressure regulator

PRODUCT DIMENSION CHART

Model: PFLRC SERIES

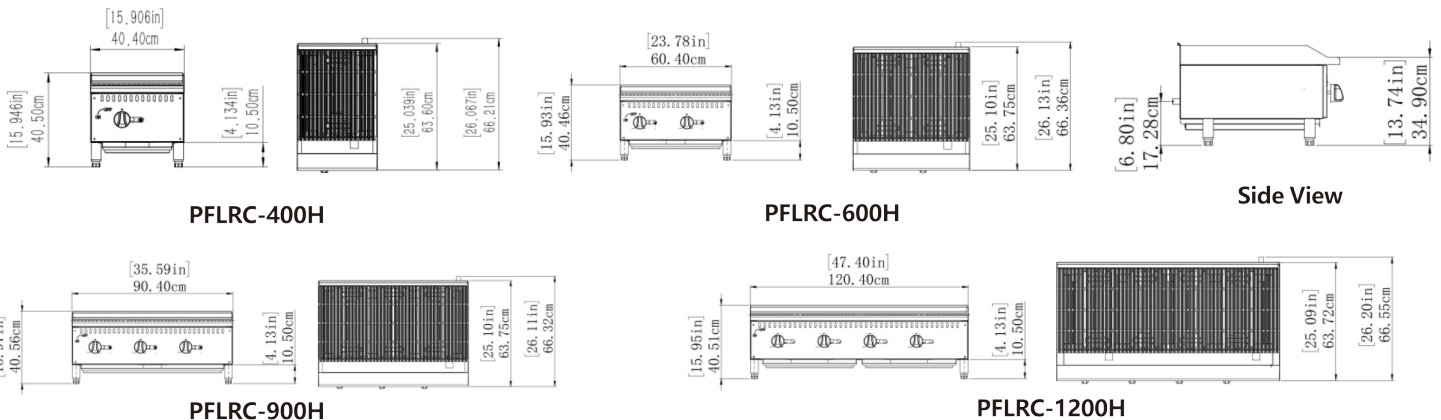

Key Parameters

Model	Product Dimension	Heat Power	Heating Burner	Gas Consumption	Gas inlet Connection	N.W	G.W	Packing dimension
PFLRC-400H	15.91"x26.13"x15.95" 404x633x405mm	30,000 BTU/H	1	LPG: 0.34(kg/h) NG: 0.789(kg/h)	3/4" BSP Male	31kg	44kg	510 *785 *485mm
PFLRC-600H	23.78"x26.13"x15.95" 604x633x405mm	60,000 BTU/H	2	LPG: 0.68(kg/h) NG: 1.578(kg/h)	3/4" BSP Male	43.5kg	59.5kg	730 *785 *485mm
PFLRC-900H	35.59"x26.13"x15.95" 904x633x405mm	90,000 BTU/H	3	LPG: 1.02(kg/h) NG: 2.367(kg/h)	3/4" BSP Male	65kg	86kg	1010 *785 *500mm
PFLRC-1200H	47.4"x26.13"x15.95" 1204x633x405mm	120,000 BTU/H	4	LPG: 1.36(kg/h) NG: 3.156(kg/h)	3/4" BSP Male	90kg	116kg	1310 *785 *500mm