

**WD-700Y** 



# TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz

Refrigerant R290

Type of Defrost Automatic

Interior Finish White

Interior Finish White

interior Fillish Wille

Temperature Range °F -8 ~ 0 °F

Compressor Power (HP) 1/5

Nema Config. NEMA5-15P



### **PRODUCT FEATURES**

- **%** Fan assisted condenser & copper evaporator.
- Temperatures in the cabinet range from -8 to 0 degrees Fahrenheit.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- **B.B.** Digital controller and LED temperature display.
- Interior LED light with switch.
- Low-E treated curved glass sliding lids to enhance better cooling.
- Anti-foggin tempered glass helps ensure a crystal clear view of the interior.
- Basket included.
- Bumper bars protection in the front of the unit to prevent impacts and support excessive usage.
- 4" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN** 



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



**(** +1(708) 590-9543



info@zuilex.com





www.zuilex.com

## **DETAILS & SPECIFICATIONS**

### **CHEST FREEZER WD-700Y**

Front View

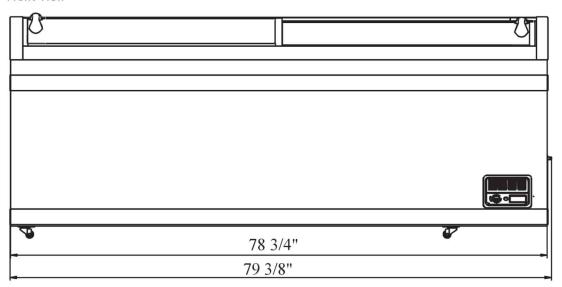



#### **MODEL WD-700Y**

**Basket Size** 11 x 21.5 x 6 Rated Voltage 220 V Rated Frequency 50 Hz 380W **Total Input Power Total Current** 3.8A **Total Capacity** 24.72 cu ft **Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG** C-Pentane **Insulation Blowing Gas** Refrigerant R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	The second control of		40HQ CONTAINER CERT.
WD-700Y	79 3/4 x 29 5/8 x 33 1/8	81 3/4 x 31 5/8 x 34 5/8	333 lbs	6	41





















www.zuilex.com