



REACH IN REFRIGERATOR

Z28R-GS1

Bottom Mounted / Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency
220V/50Hz
Refrigerant
R290
Type of Defrost
Automatic
Interior Material
Stainless Steel
Exterior Material
Stainless Steel
Temperature Range °F
33 ~ 41°F
Compressor Power (HP)
1/5
Nema Config.
NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543


info@zuilex.com

www.zuilex.com


DETAILS & SPECIFICATIONS

Z28R-GS1

Front View

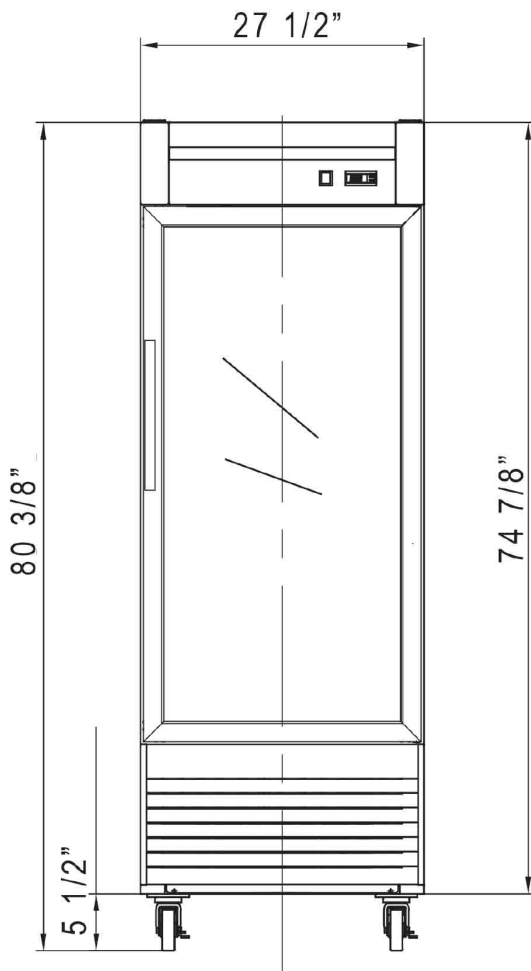

Side View

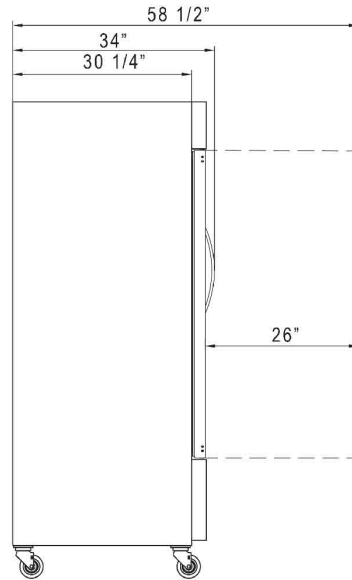

Rated Voltage	220 V
Rated Frequency	50 Hz
Total Input Power	260W
Total Current	3.1A
Total Capacity	17.79 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/3.17 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
Z28R-GS1	27 1/2 x 34 x 80 3/8	29 1/2 x 35 x 82 3/8	344 lbs	4	39



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com