

CHEF BASE

ZCB52





Voltage/Frequency 220 V/50HZ Refrigerant R290/2.29oz Type of Defrost Automatic Interial Material 304/201 Stainless Steel Exterior Material 304/201 Stainless Steel Total Current 2.088A Climatic Category 4-5

Nema Config. NEMA5-15P Compressor Power (HP) 1/5

1	~	2	
C	(⊘	5	
	\sim	بركرة	
Λ.		᠘ᡒ	
	_		

PRODUCT FEATURES

- **B.B.** Digital temperature control features a digital display to make monitoring interior temperatures a breeze. This unit also comes with an auto-defrost function.
- * Foamed-in-place insulation keeps the interior cold and adds structural strength.
- Stainless steel Interior with rounded corner for easy cleaning. Meet and exceed sanitation standards.
- Durable and high weight bearing rails for
- Heavy-duty 4" casters with brakes are included providing the unit with convenient mobility, making cleaning and servicing a breeze! Just roll the unit away from the wall.
- Ergonomic and modern recess door handles.
- Removable Drawer Gaskets, each drawer gasket is removable for easy cleaning and maintenance.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



+1(708) 590-9543




info@zuilex.com




www.zuilex.com


DETAILS &SPECIFICATIONS


ZCB52

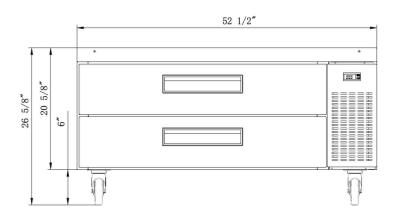



Rated Voltage 220 V Rated Frequency 50 Hz **Total Input Power** 200W 2.088A **Total Current Climatic Category** 4-5 **Protection Type Design Pressure High Side 300 PIG Design Pressure Low Side** 150 PIG **Insulation Blowing Gas** C-Pentane 242 lbs **Net Weight** NEMA5-15P Nema Config. **Temperature Range** 33~38°F **Heating Power** 236.9W 40 HQ Container Certification 63 Refrigerant R290/2.29oz 1/6 Pan Count 18 Compressor Power (HP) 1/5







Pan Layout























www.zuilex.com