










CHEF BASE

ZCB72



PRODUCT FEATURES

-  Digital temperature control features a digital display to make monitoring interior temperatures a breeze. This unit also comes with an auto-defrost function.
-  Foamed-in-place insulation keeps the interior cold and adds structural strength.
-  Stainless steel Interior with rounded corner for easy cleaning. Meet and exceed sanitation standards.
-  Durable and high weight bearing rails for drawers.
-  Heavy-duty 4" casters with brakes are included providing the unit with convenient mobility, making cleaning and servicing a breeze! Just roll the unit away from the wall.
-  Ergonomic and modern recess door handles.
-  Removable Drawer Gaskets, each drawer gasket is removable for easy cleaning and maintenance.

TECHNICAL SPECIFICATIONS

Voltage/Frequency **220V/50HZ**
 Refrigerant **R290/2.64oz**
 Type of Defrost **Automatic**
 Interior Material **304/201 Stainless Steel**
 Exterior Material **304/201 Stainless Steel**
 Total Current **2.549A**
 Climatic Category **4-5**
 Nema Config. **NEMA5-15P**
 Compressor Power (HP) **1/5**

| TEMPERATURE RANGE (F°) | EXTERNAL DIMENSION WXD XH (INCHES) | PACKAGING DIMENSION WXD XH (INCHES) | PRODUCT NET WEIGHT | DRAWERS | 40 HQ CONTAINER CERTIFICATION |
|------------------------|------------------------------------|-------------------------------------|--------------------|---------|-------------------------------|
| 33~38°F | 72x32 1/4"x26 5/8" | 73 5/8"x34 1/4"x29 1/8" | 308 lbs | 4 | 39 |

HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN




Los Angeles | San Francisco | Dallas
 Houston | Florida | Chicago | New Jersey

 +1(708) 590-9543
 info@zuilex.com
 www.zuilex.com


DETAILS & SPECIFICATIONS

ZCB72

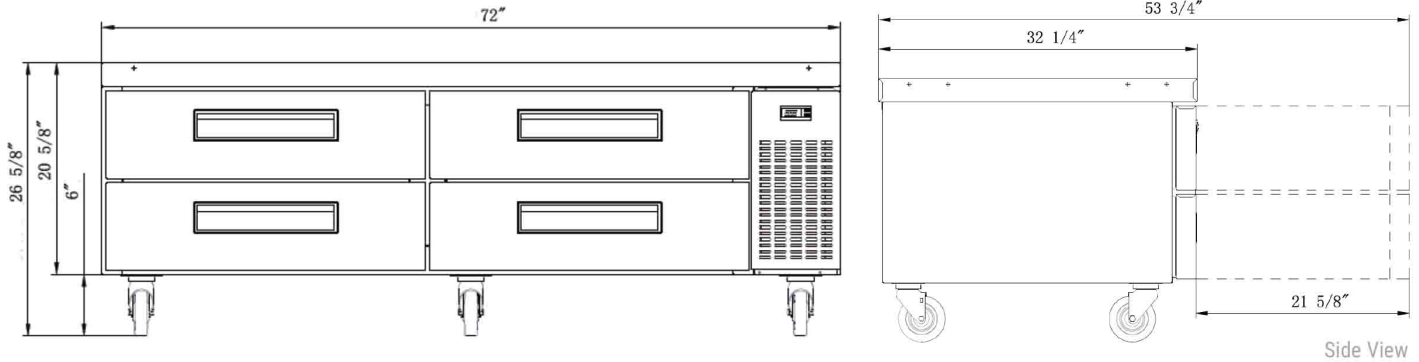


Side View

| | |
|-------------------------------|-------------|
| Rated Voltage | 220V |
| Rated Frequency | 50Hz |
| Total Input Power | 255W |
| Total Current | 2.549A |
| Climatic Category | 4-5 |
| Protection Type | I |
| Design Pressure High Side | 300 PIG |
| Design Pressure Low Side | 150 PIG |
| Insulation Blowing Gas | C-Pentane |
| Net Weight | 308 lbs |
| Nema Config. | NEMA5-15P |
| Temperature Range | 33~38°F |
| Heating Power | 288W |
| 40 HQ Container Certification | 39 |
| Refrigerant | R290/2.64oz |
| 1/6 Pan Count | 24 |
| Compressor Power (HP) | 1/5 |

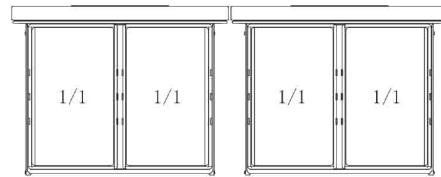


FULL PANS

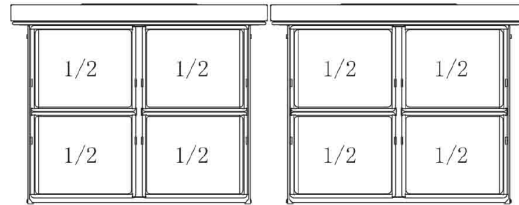

HALF PANS

Pan Layout

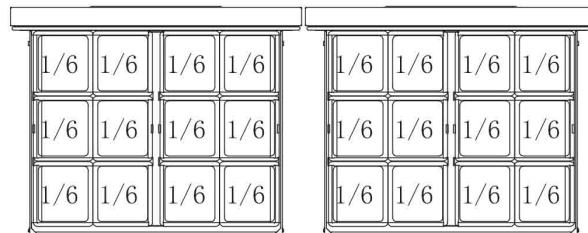

SIXTH PANS



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com