

## PIZZA PREP TABLE

ZPP6-44-S1 Single Door





Voltage/Frequency 220 V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/5

Nema Config. NEMA5-15P



- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- ☐ 6" deep 1/3 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.
  - 📆 5" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN** 



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



**(** +1(708) 590-9543




info@zuilex.com




www.zuilex.com


## **DETAILS & SPECIFICATIONS**

## PIZZA PREP TABLE ZPP6-44-S1-

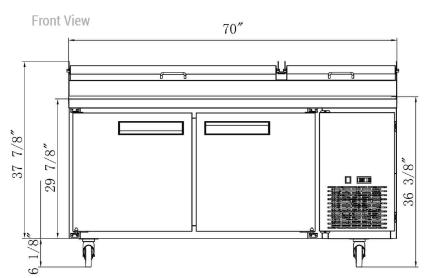



## **1/3 PAN COUNT: 9**

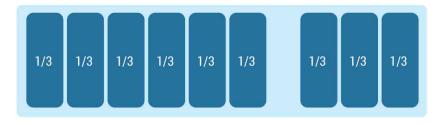

220 V Rated Voltage Rated Frequency 50 Hz 310W **Total Input Power Total Current** 2.8A **Total Capacity** 17.58 cu ft **Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG Design Pressure Low Side 150 PSIG Insulation Blowing Gas C-Pentane** Refrigerant R290/4.76 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
ZPP6-44-S1	70 x 31 1/2 x 43 7/8	71 3/8 x 35 7/8 x 48 3/8	297 lbs	2	26





















www.zuilex.com