

3-Door







Voltage/Frequency 220V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2+ Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- ☐ 6" deep 1/3 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.
 - 📆 5" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(+1(708) 590-9543



info@zuilex.com





www.zuilex.com

DETAILS &SPECIFICATIONS


PIZZA PREP TABLE

ZPP12-90-S

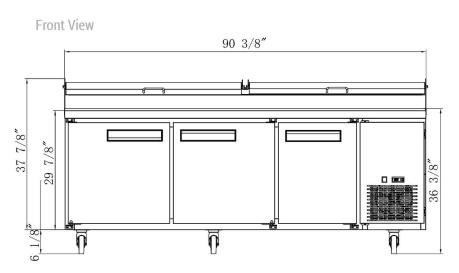



1/3 PAN COUNT: 12



Rated Voltage 220 V Rated Frequency 50 Hz **Total Input Power** 620W **Total Current** 8.5A 24.89cu ft **Total Capacity Climatic Category** 4-5 **Protection Type** Design Pressure High Side **300 PSIG Design Pressure Low Side 150 PSIG Insulation Blowing Gas** C-Pentane Refrigerant R290/4.93 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
ZPP12-90-S	90 3/8 x 31 1/2 x 43 7/8	91 3/8 x 35 7/8 x 48 3/8	423 lbs	3	26





















www.zuilex.com