



ZUILEX
Refrigeration & Cooking Equipment

**PREMIUM
WARRANTY**

GLASS DOOR MERCHANDISER

ZSM-15R

Single Glass Swing Door Refrigerator



i TECHNICAL SPECIFICATIONS

Voltage/Frequency **220V/50Hz**
Refrigerant **R290**
Type of Defrost **Automatic**
Interior Finish **White**
Exterior Finish **Black**
Temperature Range °F **33 ~ 40°F**
Compressor Power (HP) **1/5**
Nema Config. **NEMA5-15P**



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrosting system.



Temperature Range 33 ~ 40°F, with auto defrost function, which ensures optimal performance day-in and day-out.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Interior and canopy LED light with switch on the right side to always show your products at their best



High quality coated stainless adjustable shelves prevent peel and rust.



Anti-fogging tempered glass door helps ensure a crystal clear view of the interior.



HIGH QUALITY & ROBUST DESIGN



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey



+1(708) 590-9543



info@zuilex.com




www.zuilex.com


DETAILS & SPECIFICATIONS

ZSM-15R

Front View

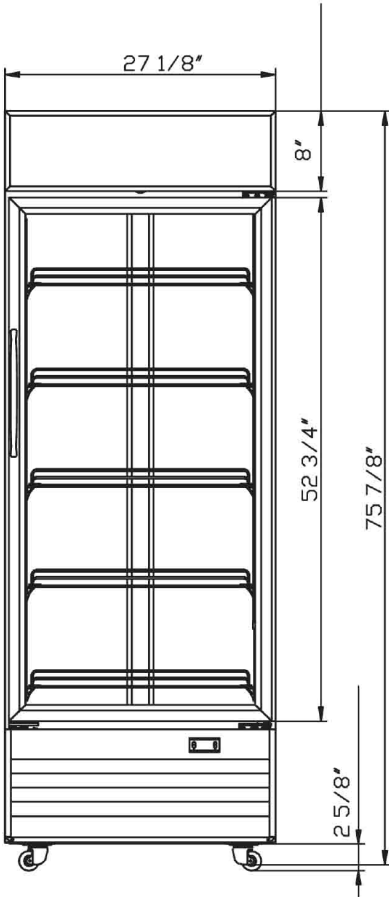

Side View

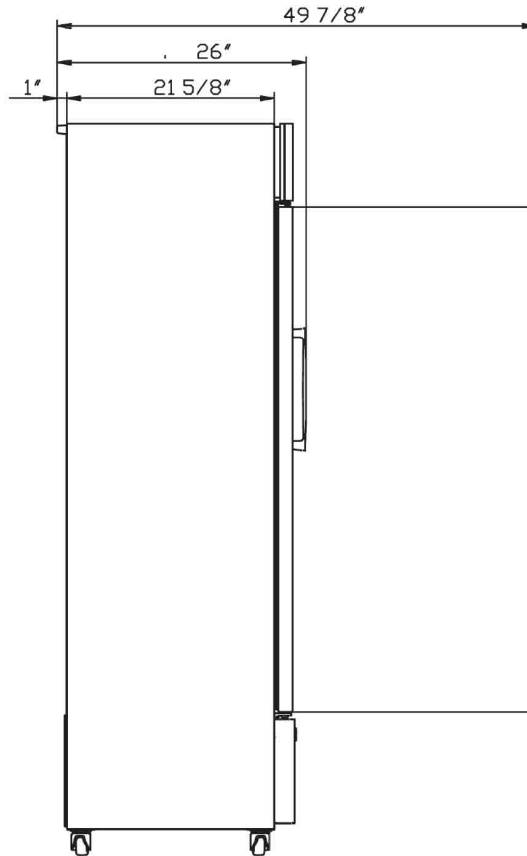

Rated Voltage	220V
Rated Frequency	50Hz
Total Input Power	260W
Total Current	2.3A
Total Capacity	14.72 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/2.82 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
ZSM-15R	27 1/8 x 26 x 75 7/8	29 1/8 x 27 x 77 7/8	241 lbs	5	51



AutoQuotes



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@zuilex.com

www.zuilex.com