

Commercial Gas Griddle

PFLRG SERIES

PARAMETERS SHEET

MODEL#: PFLRG-SERIES



MODEL # PFLRG-400



Choose GAS TYPE When Placing Order

☐ **LPG**
Liquefied Propane Gas

☐ **NG**
Natural Gas

Specifications

- Stainless steel for front, Left & Right & Back Galvanized
- Self-produced good quality U-shape burner with power of 30,000BTU/H each
- Thick griddle plate
- Brass Gas Valve from Brand Alpha
- Manual ignition
- Height Adjustable leg
- 3/4" rear gas connection and gas pressure regulator
- ETL Safety and ETL Sanitation approved

Models in PFLRG series


- ☐ **PFLRG-400 Gas Griddle**
- ☐ **PFLRG-600 Gas Griddle**
- ☐ **PFLRG-900 Gas Griddle**
- ☐ **PFLRG-1200 Gas Griddle**

Standard Accessories


- Adjustable bullet leg
- Convert kit of LP and NPG

PRODUCT DIMENSION CHART


Model: PFLRG SERIES




PFLRG-400




PFLRG-600




Top View

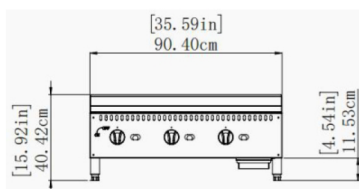

PFLRG-900

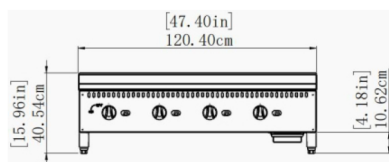

PFLRG-1200



Side View

Model	Product Dimension	Heat Power	Heating Burner	Gas Consumption	Gas inlet Connection	N.W	G.W	Packing dimension
PFLRG-400	17.97x26.11x15.92 inch 456x663x405mm	30,000 BTU/H	1	LPG: 0.34(kg/h) NG: 0.789(kg/h)	3/4" NPT Male	31kg	44kg	565 *785 *490mm
PFLRG-600	23.97x26.11x15.92 inch 604x663x405mm	60,000 BTU/H	2	LPG: 0.68(kg/h) NG: 1.578(kg/h)	3/4" NPT Male	43.5kg	59.5kg	720 *785 *490mm
PFLRG-900	35.78x26.11x15.92 inch 904x663x405mm	90,000 BTU/H	3	LPG: 1.02(kg/h) NG: 2.367(kg/h)	3/4" NPT Male	65kg	86kg	1010 *785 *490mm
PFLRG-1200	47.4x26.11x15.92 inch 1204x663x405mm	120,000 BTU/H	4	LPG: 1.36(kg/h) NG: 3.156(kg/h)	3/4" NPT Male	90kg	116kg	1310 *785 *490mm



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@powerfry.us

www.powerfry.us