

Commercial Gas range with under oven

PFFSO- SERIES

PARAMETERS SHEET

MODEL#: PFFSO-24/36-J



MODEL # PFFSO-36-J

Specifications

- Stainless steel for front, Left & Right & Back Galvanized
- Cast Iron burner with power of 30,000BTU/H
- Cast iron grate
- Italy SABAF Thermostatic Valve for oven
- Oven temp range: 200 °F -550 °F
- Manual ignition
- Oven with enamel finishing easy to clean
- Height Adjustable leg
- ETL Safety and ETL Sanitation approved

Choose GAS TYPE When Placing Order

- ☐ LPG
Liquid Propane Gas
- ☐ NG
Natural Gas

Models in PFFSO-J series

PFFSO-24-J
4 burners with oven

PFFSO-36-J
6 burners with oven

Standard Accessories


- Adjustable bullet leg
- Back slat with top holding shelf
- 2 pcs baking shelves/oven

Optional Accessories


- Casters
- Pilot switch

PRODUCT DIMENSION CHART



Model: PFFSO-24-J/PFFSO-36-J

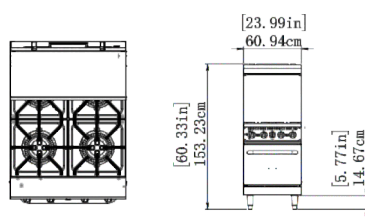

PFFSO-24-J



PFFSO-36-J



Side View

Model	Product Dimension	Heat Power	Heating Burner	Gas Consumption	Gas inlet Connection	N.W	G.W	Packing dimension
PFFSO-24-J	24"x32.67"x60.33"inch 610x827x1532mm	Burner:30,000 BTUx4 Oven:30,000 BTUx1	Burner: 4 Oven:1	LPG: 1.6994(kg/h) NG: 3.964(kg/h)	3/4" NPT Male	129kg	161.5kg	720X1010X890mm
PFFSO-36-J	36"x32.67"x60.33"inch 915x827x1532mm	Burner:30,000 BTUx6 Oven:30,000 BTUx1	Burner: 6 Oven: 1	LPG: 2.3729(kg/h) NG: 5.542(kg/h)	3/4" NPT Male	171kg	204kg	1010X1010X890mm



Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

+1(708) 590-9543

info@powerfry.us

www.powerfry.us