

REACH IN FREEZER

Z28AF-GS1

Top Mounted / Glass Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency 220 V/50Hz

Refrigerant

R290

Type of Defrost

Automatic

Interial Material

Stainless Steel

Exterior Material

Stainless Steel

Temperature Range °F

0 ~ -8°F

Compressor Power (HP)

Nema Config.

NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ※ Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- 🧩 R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Depoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 📆 Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL &

ROBUST DESIGN



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(1) +1(708) 590-9543



info@zuilex.com




www.zuilex.com

DETAILS & SPECIFICATIONS

Z28AF-GS1

27 1/2" Fron 3/8"

Side View

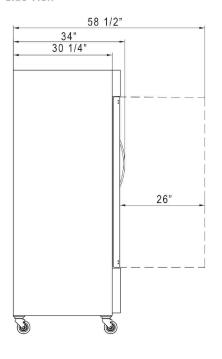

Rated Voltage 220V Rated Frequency 50Hz **Total Input Power** 550W **Total Current** 5.3A 8.1kW.h/24h **Energy Consumption Total Capacity** 17.79 cu ft **Climatic Category Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG Insulation Blowing Gas** C-Pentane Refrigerant R290/4.41oz

| MODEL | EXTERNAL DIMENSION WXDXH (INCHES) | PACKAGING DIMENSION WXDXH (INCHES) | | | 40HQ CONTAINER CERT. |
|-----------|--------------------------------------|---------------------------------------|---------|---|-------------------------|
| Z28AF-GS1 | 27 1/2 x 35 5/8 x 80 3/8 | 29 1/2 x 36 5/8 x 82 3/8 | 308 lbs | 4 | 39 |




















info@zuilex.com



www.zuilex.com