

REACH IN FREEZER

Z28F-GS1 Bottom Mounted / Glass Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency 220 V/50Hz Refrigerant

R290

Type of Defrost

Automatic

Interial Material

Stainless Steel

Exterior Material

Stainless Steel

Temperature Range °F

0~-8°F

Compressor Power (HP)

3/4

Nema Config.

NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- ★ Temperatures in the cabinet range from 0 to -8° degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- 🧩 R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- [] Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- **忆** Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(1) +1(708) 590-9543



info@zuilex.com




www.zuilex.com


DETAILS & SPECIFICATIONS

Z28F-GS1

Front View

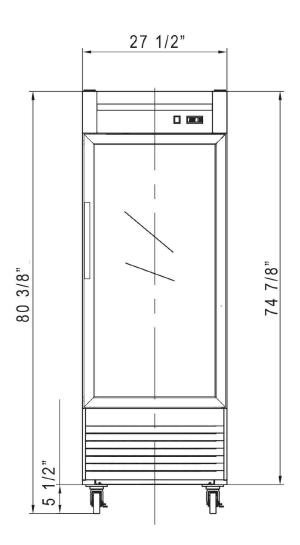

Side View

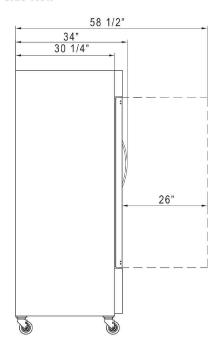

Rated Voltage 220 V 50 Hz Rated Frequency **Total Input Power** 550W 5.3A **Total Current** 8.1kW.h/24h **Energy Consumption Total Capacity** 17.79 cu ft **Climatic Category Protection Type** Design Pressure High Side **300 PSIG** Design Pressure Low Side **150 PSIG Insulation Blowing Gas** C-Pentane Refrigerant R290/4.41oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
Z28F-GS1	27 1/2 x 34 x 80 3/8	29 1/2 x 35 x 82 3/8	308 lbs	4	39



















info@zuilex.com



www.zuilex.com