

REACH IN REFRIGERATOR

Z55AR-GS2 Top Mounted / 2 Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/2+ Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the top and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Hinged glass doors, tempered glass, UV blocking.
- 🧩 R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- [] Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 📆 Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(1) +1(708) 590-9543



info@zuilex.com





www.zuilex.com

DETAILS &SPECIFICATIONS

Z55AR-GS2

Side View

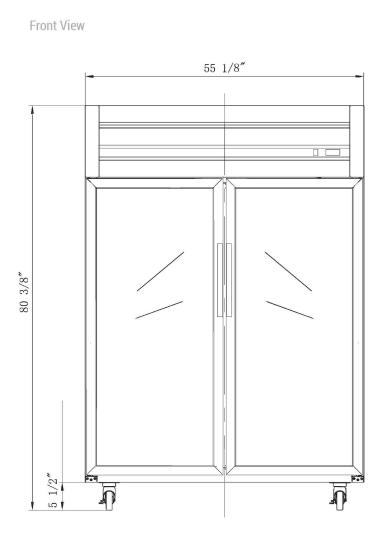

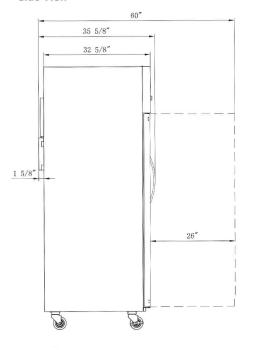

<u>+</u>	
Rated Voltage Rated Frequency Total Input Power Total Current Total Capacity Climatic Category Protection Type Design Pressure High Side Design Pressure Low Side	220V 50Hz 730W 8.6A 41.73 cu ft 4-5 I 300 PSIG 150 PSIG C-Pentane
	C-Pentane
Insulation Blowing Gas Refrigerant	C-Pentane R290/4.58 oz
heiligefant	H290/4.30 02

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
Z55AR-GS2	55 1/8 x 35 5/8 x 80 3/8	56 3/4 x 36 5/8 x 84 3/8	485 lbs	8	16



















info@zuilex.com



www.zuilex.com