





## TECHNICAL SPECIFICATIONS

Voltage/Frequency 220V/50Hz Refrigerant R290
Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1-Nema Config. NEMA5-15P

- The compressor is mounted in the bottom for better heat evaporation.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- 🧩 R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Depoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust
- Lifetime warranty on hinges.
- 📆 Adjustable front locking casters.





Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



**(1)** +1(708) 590-9543




info@zuilex.com




www.zuilex.com

## **DETAILS & SPECIFICATIONS**

## **Z55F**

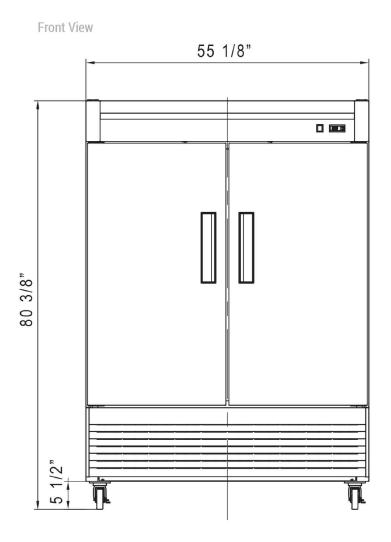

Side View



Rated Voltage	220 V		
Rated Frequency	50 Hz		
Total Input Power	1250W		
Total Current	11.8 A		
Total Capacity	40.74 cu ft		
Climatic Category	4-5		
Protection Type	1		
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/5.11 oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
Z55F	55 1/8 x 34 x 80 3/8	57 1/8 x 36 x 82 3/8	463 lbs	8	21



















info@zuilex.com



www.zuilex.com