

(Refrigerator and Freezer)

Z83RF Bottom Mounted / 3-Solid Door





TECHNICAL SPECIFICATIONS

Voltage/Frequency 220 V/50 Hz

Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel

Temperature Range °F Freezer: 0 ~ -8°F Refrigerator: 33 ~ 41°F

Compressor Power (HP) 1/2++3/4 Nema Config. NEMA5-15P



PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- B Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * One section freezer, two section refrigerator Freezer: 0 ~ -8°F, Refrigerator: 33 ~ 41°F
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Lifetime warranty on hinges.
- 📆 Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey







info@zuilex.com




www.zuilex.com


DETAILS & SPECIFICATIONS

Z83RF

Front View

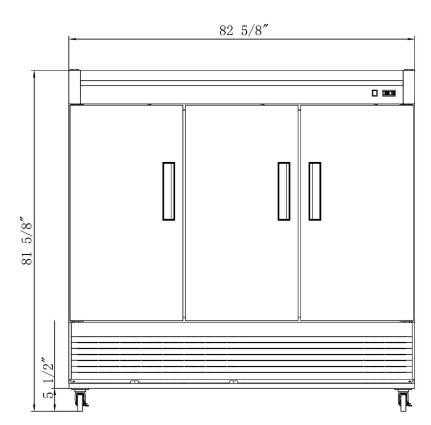

Side View



220 V		
50 Hz		
500W + 800W		
5A + 9A		
41.9 + 19.24 cu ft		
4-5		
1		
300 PSIG		
150 PSIG		
C-Pentane		
R290/4.23 + 3.7 oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	THE RESIDENCE OF THE PARTY OF THE PARTY.		40HQ CONTAINER CERT.
Z83RF	82 5/8 x 32 5/8 x 81 5/8	84 1/4 x 33 5/8 x 83 5/8	700 lbs	12	13























www.zuilex.com