

**UNDERCOUNTER FREEZER** 

ZUC29F Single Door





Voltage/Frequency 220 V/50Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel Exterior Material Stainless Steel Temperature Range °F 0 ~ -8°F Compressor Power (HP) 1/3 Nema Config. NEMA5-15P



## **PRODUCT FEATURES**

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- BB Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- \* Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit.
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.
- 忆 6" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN** 



Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey








info@zuilex.com




www.zuilex.com

## **DETAILS & SPECIFICATIONS**

## UNDERCOUNTER ZUC29F-

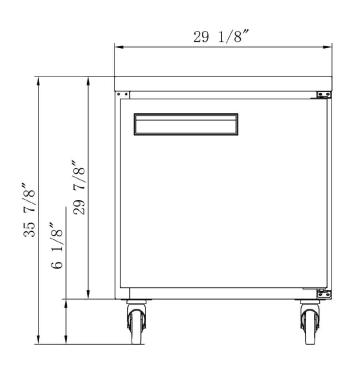

Front View



Rated Voltage	220V		
Rated Frequency	50 Hz		
Total Input Power	550W		
Total Current	2.3A		
Total Capacity	6.99 cu ft		
Climatic Category	4-5		
Protection Type			
Design Pressure High Side	300 PSIG		
Design Pressure Low Side	150 PSIG		
Insulation Blowing Gas	C-Pentane		
Refrigerant	R290/3.17oz		

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)			40HQ CONTAINER CERT.
ZUC29F	29 1/8 x 31 1/2 x 36	30 1/2 x 33 1/8 x 39 3/8	158 lbs	1	60























info@zuilex.com



www.zuilex.com