



by: Acme Fence Services, Inc.

We are reaching out to introduce **Beat Wall™**, a new training tool designed specifically for modern tennis facilities.

Beat Wall helps clubs like yours:


- **Boost revenue** by transforming dead space into active, rentable training zones.
- **Engage players** with dynamic, high-repetition solo practice sessions.
- **Retain members** by offering a unique, tech-forward amenity standard courts lack.

Imagine giving your members the power to master their game entirely on their own. We just launched **Beat Wall™**, and we want _____ to be the very first in your area to offer this ultimate solo practice experience.

Gain a competitive edge as the exclusive local club offering **Beat Wall™**



The practice wall is built from performance materials, making it the best practice wall on the market. **BEAT WALL™** can be installed on new or existing tennis courts. **BEAT WALL** is used to improve the players' consistency and technique without a practice partner.

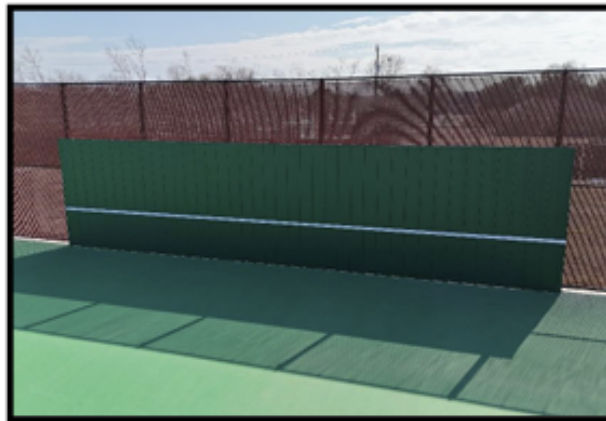

The **BEAT WALL™** is built from advanced top-tier industrial components designed to withstand daily, aggressive outdoor athletic use.

ACME FENCE SERVICES INC.

SPORTS COMPLEX FENCING, INDUSTRIAL,
COMMERCIAL & RESIDENTIAL
FT. WORTH, TEXAS

817-831-8880
ACMEFENCESERVICES.NET



"THE PARTNER THAT NEVER MISSES"



Select from three vibrant, weather resistant color options to accent your facility.

Color Choices:

Monster Green



All Star Gray



Stadium Blue



The **BEAT WALL™ turns any fenced tennis court into a personal, high-intensity training ground.**

UV RESISTANCE NO RUST NO ROT

BEAT WALL™

3 mil THICK SURFACE COATED PANELS
3 HEAVY DUTY RAILS BOLTED DIRECTLY TO THE POST
FLAWLESS MOUNTING
FIELD-TESTED DURABILITY
SAME IMPACT RESISTANCE MATERIAL TRUSTED ON ELITE BASEBALL COMPLEX WALLS
STANDARDS DIMENSIONS: 8' X 20'

Base Material Virgin Polyvinyl Chloride (PVC)
Color Layer Material Acrylonitrile Styrene Acrylate (ASA)

Overall Thickness	0.24	in
Color Layer Thickness	0.003	in
Weight	2.58	lbs/ft ²
Density	86.2	lb/ft ³
Tensile Strength	377	psi
Panel Width Finished	12.0	in
Panel Width O/A	13.4	in
Min. Ambient Operating Temp.	32	°F

ASTM 2440-18 Test Result	Pass
Gmax (ASTM F1292) Avg.	63
HIC (ASTM F1292) Avg.	249

Warranty	20	Years
----------	----	-------

Color choices -Wall	Monster Green	RAL 6005
	All-Star Gray	RAL 7026
	Stadium Blue	RAL 5010

Back of all Wall Panels	Lt. Gray	
Color - StadiumGuard Cap	Yellow	RAL 1023